

**VM SERIES STAINLESS STEEL
In-Line Vertical Multistage Centrifugal Pumps**
Model Numbers: **VM3, VM5, VM10, VM16
VM32, VM65 & VM90**

DEPEND ON
DAVEY

WATER PRODUCTS



**ALL STAINLESS STEEL
MULTISTAGE PUMPS**

**PRODUCT
DESCRIPTION**

Vertical in-line multistage centrifugal pump with stainless steel hydraulic parts.

APPLICATIONS

Pumping of clean, non-aggressive liquids, free of fibres in suspension, suitable for applications such as:-

- Water supply - domestic, rural & industrial
- Pressure boosting
- Agriculture & farming
- Turf water & irrigation
- Commercial - high pressure washing & water treatment
- Boiler feed

FEATURES & BENEFITS

Vertical multistage centrifugal pump with in line suction and discharge

- Minimum floor space required and easy to install

All hydraulic parts constructed in stainless steel

- Long service life
- Corrosion and abrasion resistance

High efficiency stainless steel impeller design

- Low operating costs
- Less stages required
- Low maintenance

Raised bottom bearing

- Longer bearing life through reduced risk of damage from sediment

Hard faced mechanical seal

- Longer seal life

Teflon neck rings

- Maintains high efficiency
- Reduces vibration and noise
- Reduces sensitivity to thermal expansion

Tungsten carbide intermediate bearing/s (selected models)

- Reduces possible damage from shaft misalignment or vibration

Stainless steel threaded companion flanges with gaskets, nuts, bolts & washers included with every pump

- Easier installation
- Guaranteed material quality

OPERATING LIMITS

Capacities to 110m³/hr (1833lpm)

Pressure heads to 230m

Maximum discharge pressure PN25 255m

Maximum suction pressure Refer pg 2

Temperature range -15° to +70°C

Hot water type available on request +70° to +120°C

Motor - three phase* 400V ± 10%

Motor - single phase*
up to 2.2kW 230V ± 10%
3.0 to 4.0kW 240/480V ± 10%

Single phase up to 1.5kw 240V motor supplied with Aust. standard plug

Rotation Anti-clockwise (top view)

*Other voltages on request



TECHNICAL SPECIFICATIONS


MAXIMUM INLET PRESSURE

Model	Maximum Inlet Pressure
VM3-8	6 bar
VM3-12 & above	10 bar
Up to VM5-10	10 bar
VM5-12 & above	15 bar
Up to VM10-6	6 bar
VM10-8 & above	10 bar
VM16-2 and VM16-3	6 bar
VM16-4 & above	10 bar
VM32-2A	3 bar
VM32-3 to VM32-4	4 bar
VM32-6 to VM32-10	10 bar
VM32-12	15 bar
VM65-2A	4 bar
VM65-2 to VM65-3	10 bar
VM65-4A and VM65-5	15 bar
Up to VM90-3A	10 bar
VM90-3 & above	15 bar

MAXIMUM WORKING PRESSURE

Model	Curve Number
Up to VM3-23	1
VM3-29	2
Up to VM5-16	1
VM5-19 and VM5-22	2
Up to VM10-12	1
VM10-14 & above	3
Up to VM16-8	1
VM16-11 & VM16-14	3
Up to VM32-6	1
VM32-8 & above	4
VM65 range	1
Up to VM90-4	1
VM90-5 & above	4

The following figure shows the limitation of pressure and temperature, which shall be kept within the region as shown in the figure.

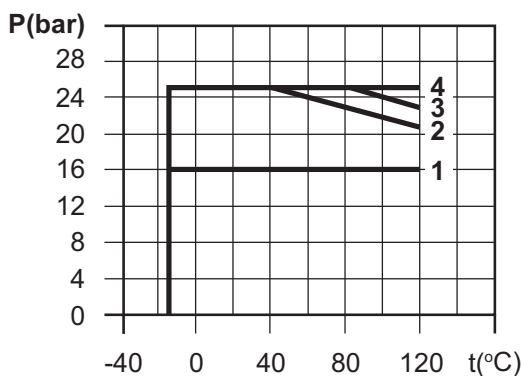

MATERIALS OF CONSTRUCTION


PART	MATERIAL
Pump attachment base	Cast iron
Suction & discharge casing	304 stainless steel
Motor support lantern	Cast iron
Impellers	304 stainless steel
Stages (casing)	304 stainless steel
Outside sleeve	304 stainless steel
Pump shaft	316L stainless steel
Intermediate bearing	Tungsten carbide
Mechanical seal	Silicon carbide/carbon/EPDM
Orings (casing)	EPDM
Plugs (drainage & priming)	316L stainless steel
Impeller neck rings	Teflon

* Special version with 316L stainless steel & viton orings on request

NOTE: 304 stainless steel, (Z6 CN 18.9) and **316L stainless steel** (Z2 CND 17.12) are recommended materials that are highly resistant to corrosion. Suitable for pumping clean, clear non-viscous liquids, containing no fibres or solids. Maximum sand/silica concentration 40 g/m³.

IDENTIFICATION OF THE PUMP

VM 32 - 2A/3

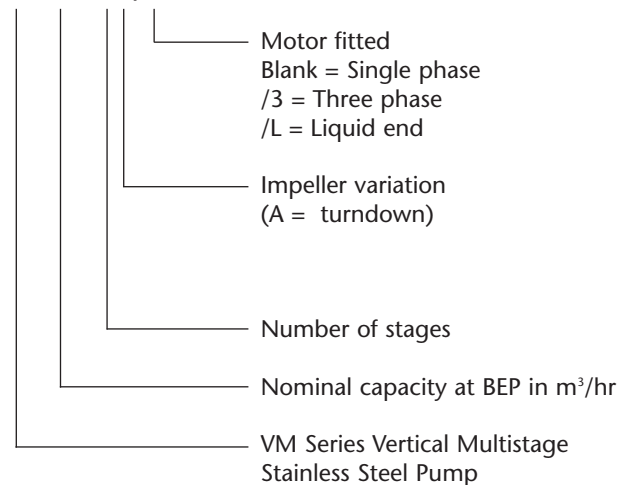




ALTITUDE & TEMPERATURE VS LOSS OF HEAD

Guide only - altitude and temperature losses are added.

Altitude	Loss of head	Temperature	Loss of head
0m	0m	20°C	0.20m
500m	0.60m	30°C	0.40m
1000m	1.15m	40°C	0.70m
1500m	1.70m	50°C	1.20m
2000m	2.20m	60°C	1.90m
2500m	2.65m	70°C	3.10m
3000m	3.20m	80°C	4.70m
		90°C	7.10m
		100°C	10.30m

TECHNICAL SPECIFICATIONS




VM3 HYDRAULIC PERFORMANCE

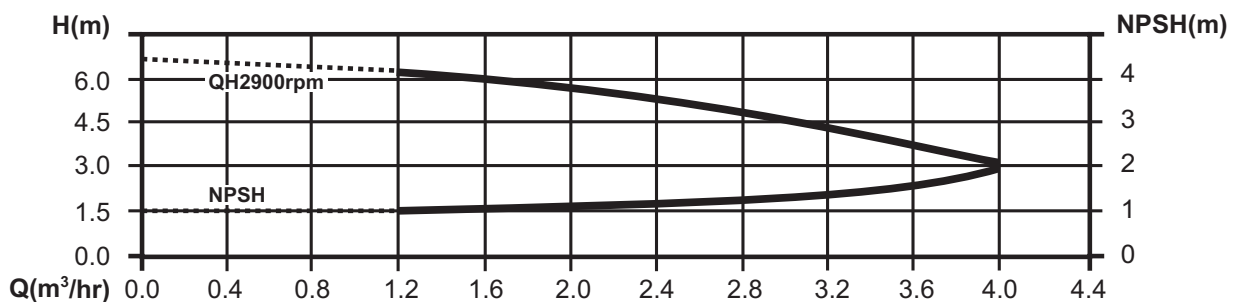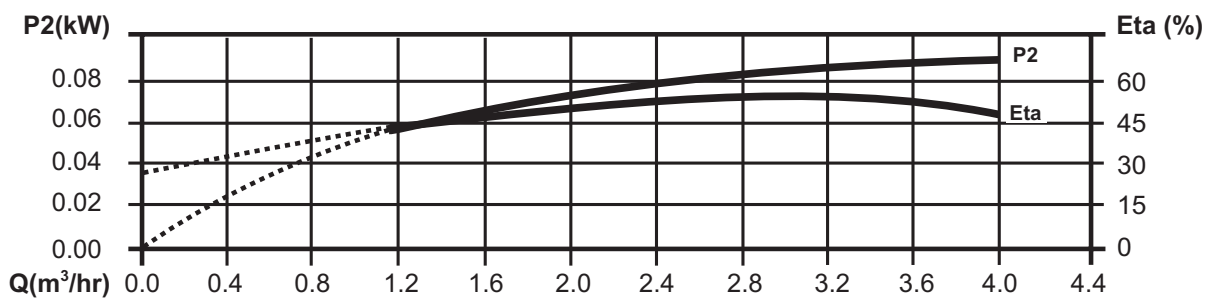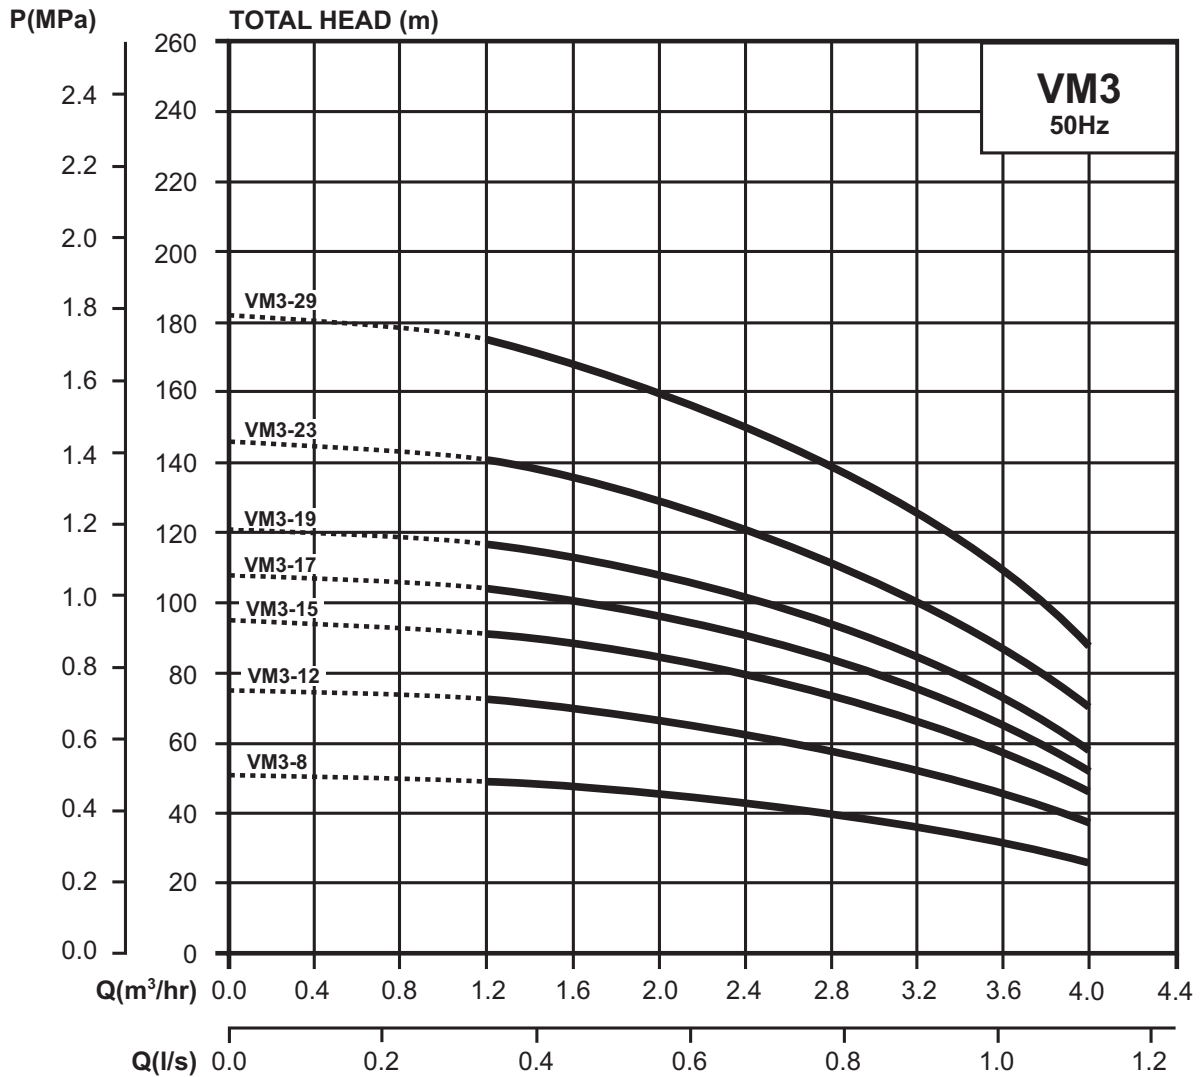

NOTE: CURVE TOLERANCE IN CONFORMITY WITH ISO9906 APPENDIX A.

TECHNICAL SPECIFICATIONS




VM5 HYDRAULIC PERFORMANCE

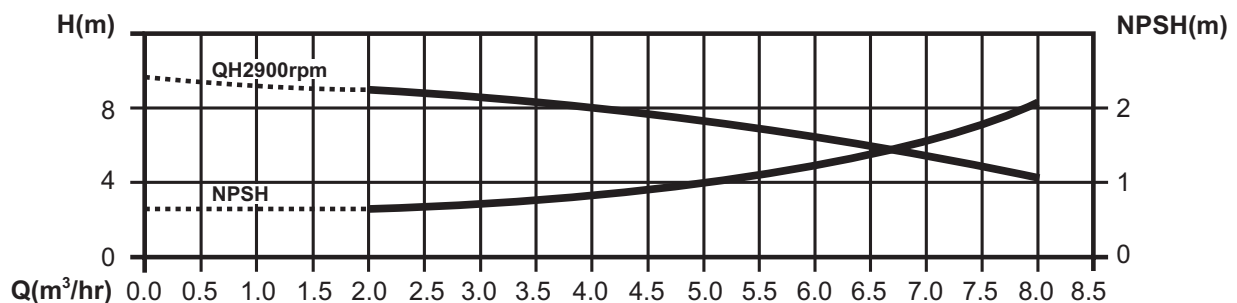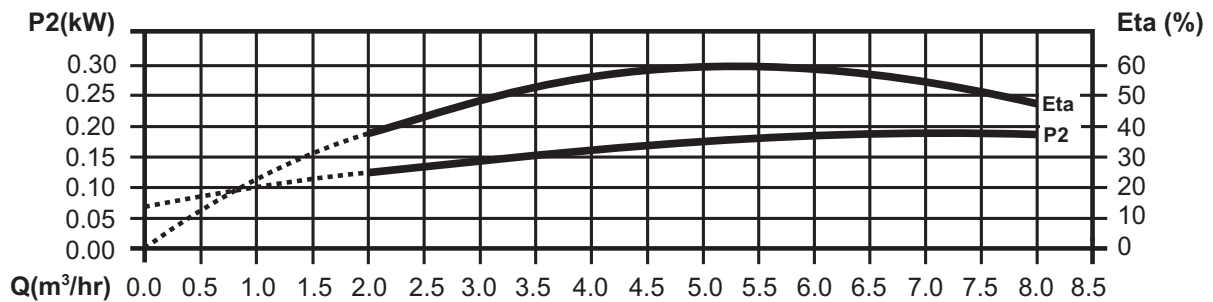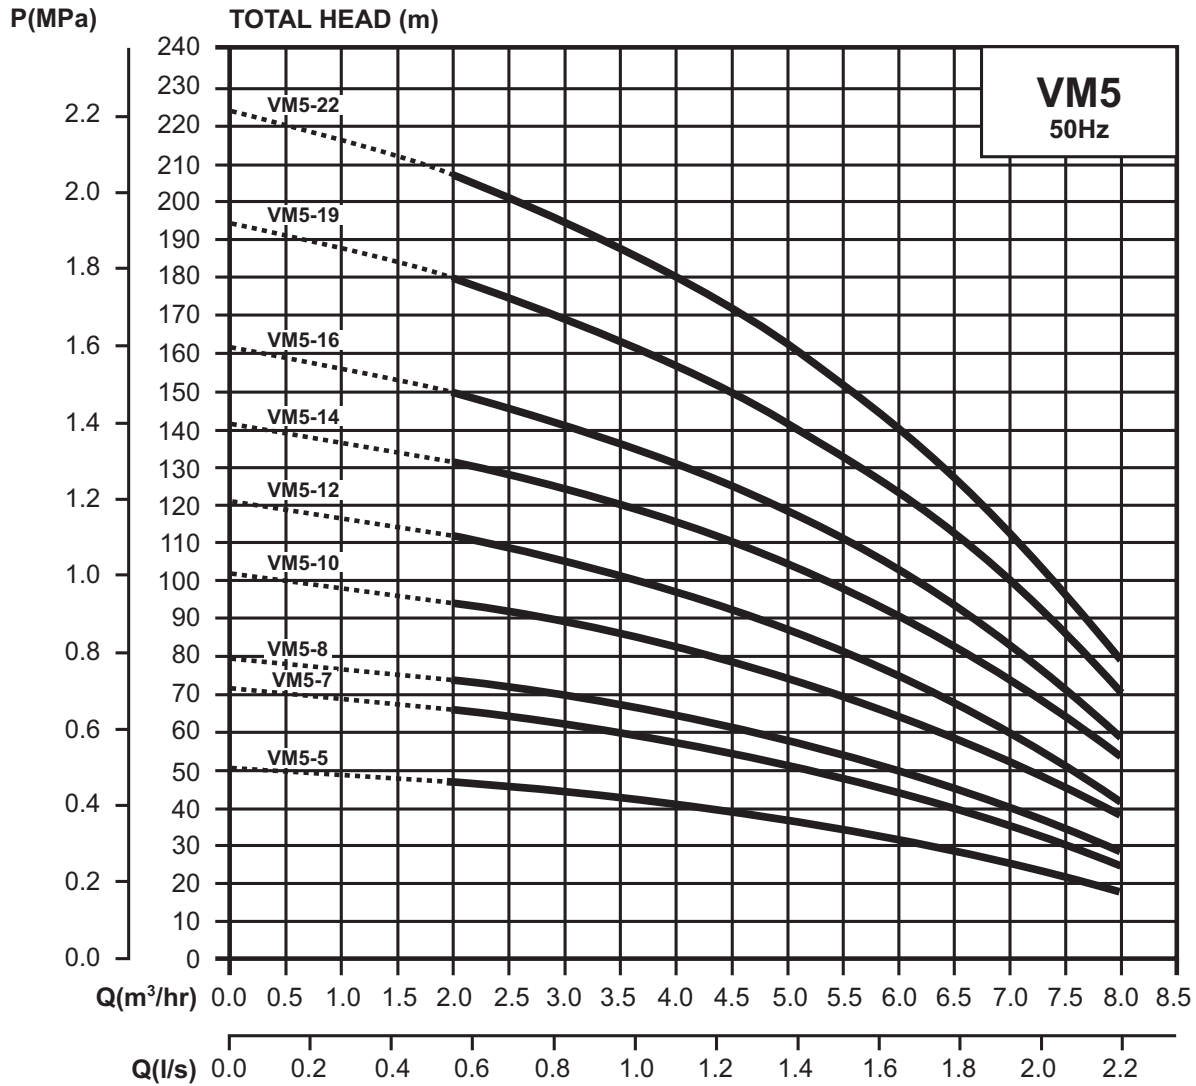

NOTE: CURVE TOLERANCE IN CONFORMITY WITH ISO9906 APPENDIX A.

TECHNICAL SPECIFICATIONS




VM10 HYDRAULIC PERFORMANCE

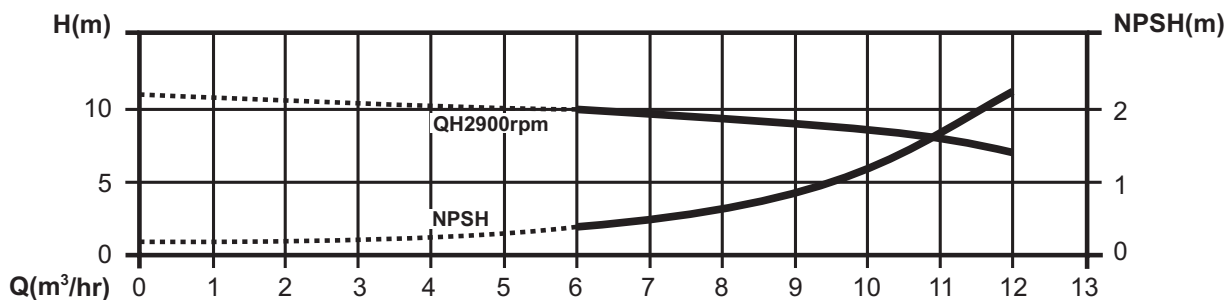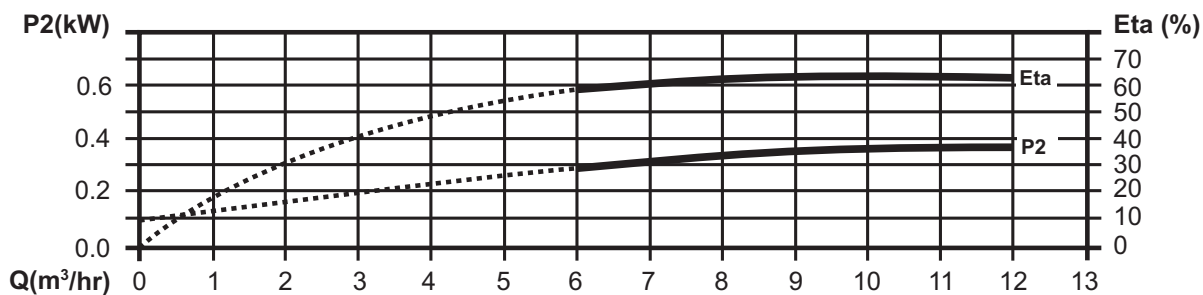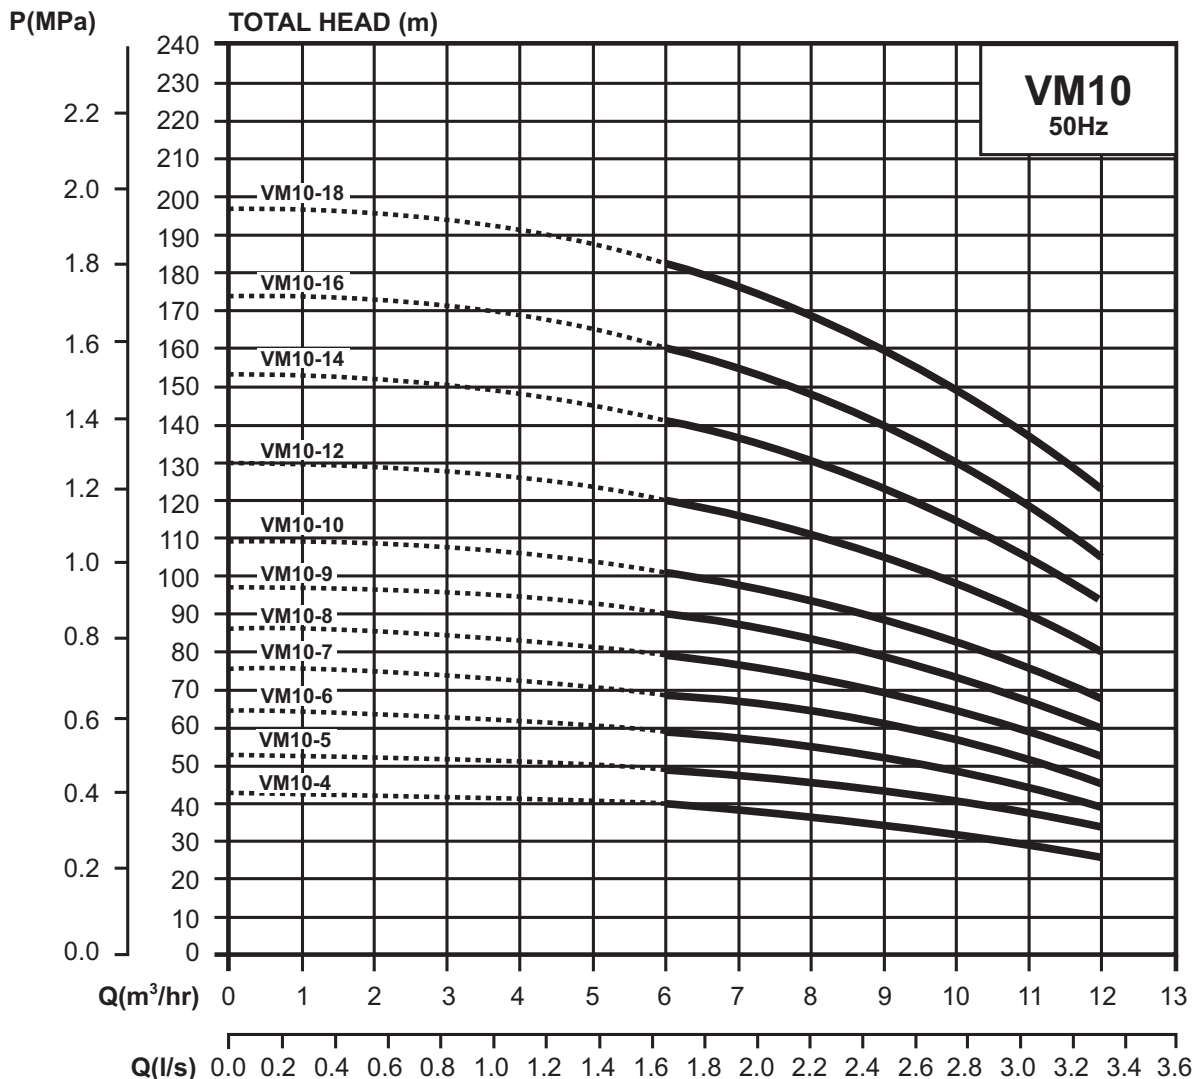

NOTE: CURVE TOLERANCE IN CONFORMITY WITH ISO9906 APPENDIX A.

TECHNICAL SPECIFICATIONS




VM16 HYDRAULIC PERFORMANCE

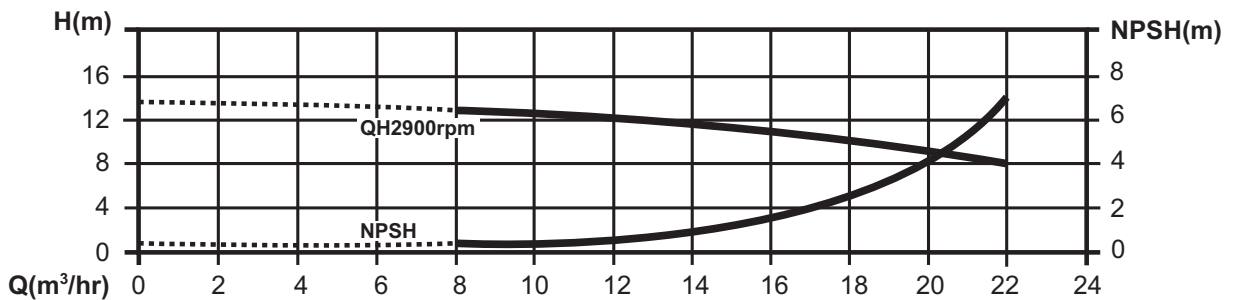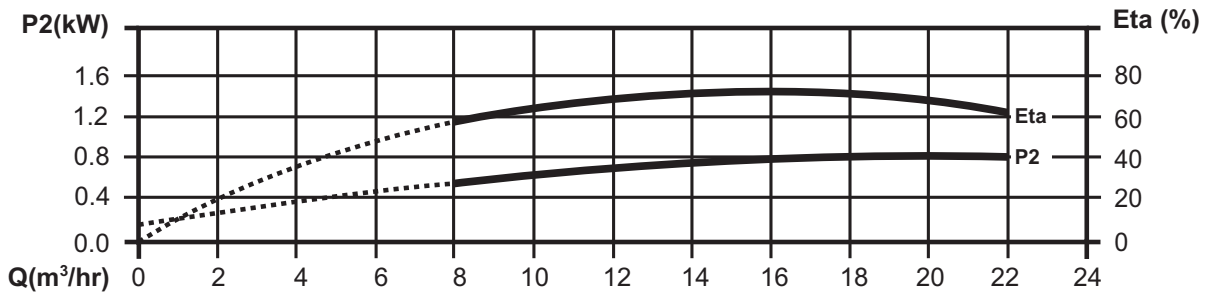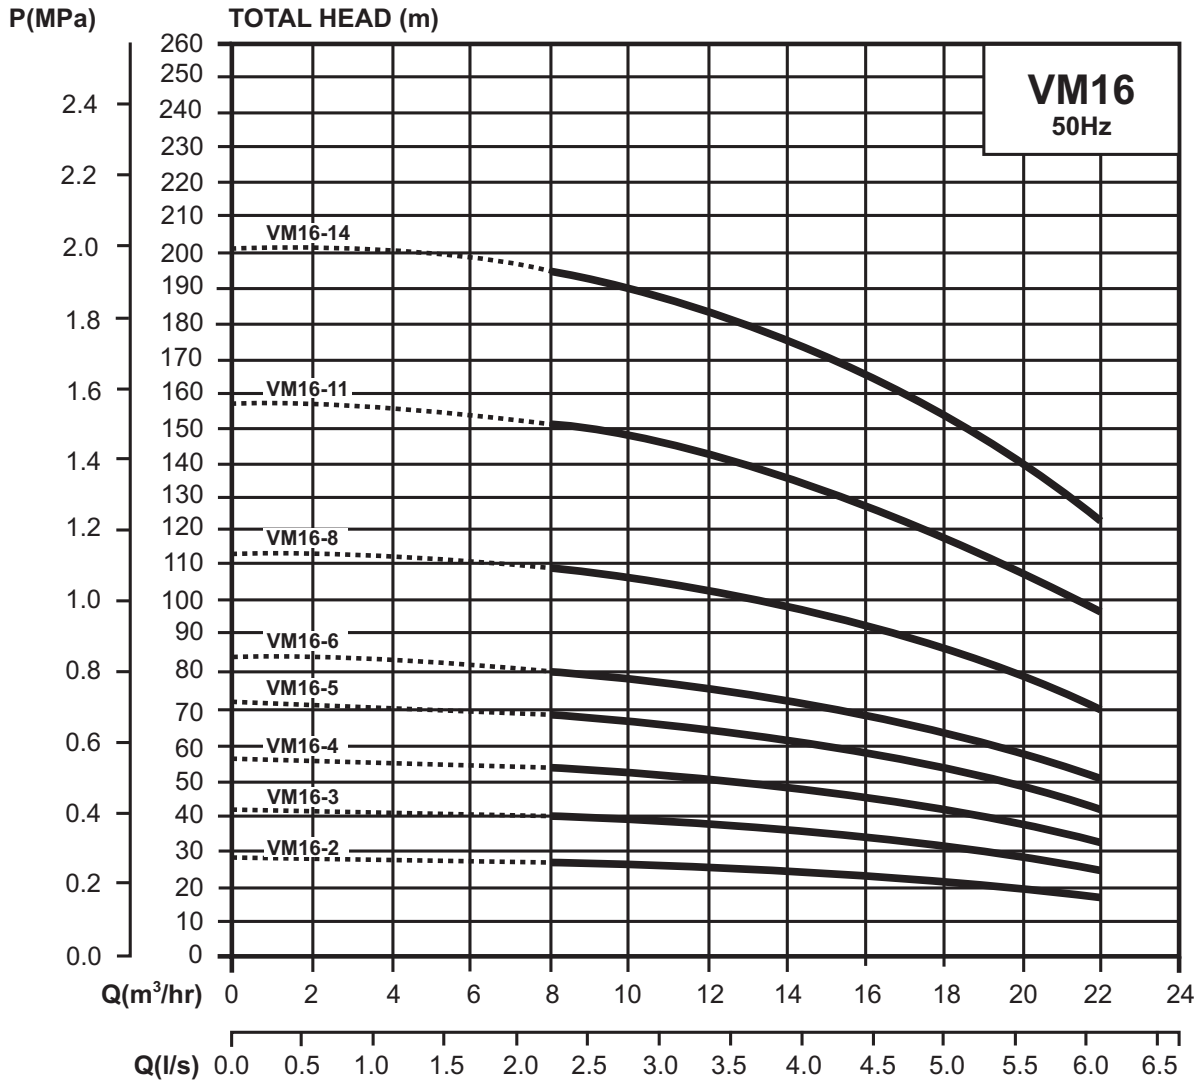

NOTE: CURVE TOLERANCE IN CONFORMITY WITH ISO9906 APPENDIX A.

TECHNICAL SPECIFICATIONS




VM32 HYDRAULIC PERFORMANCE

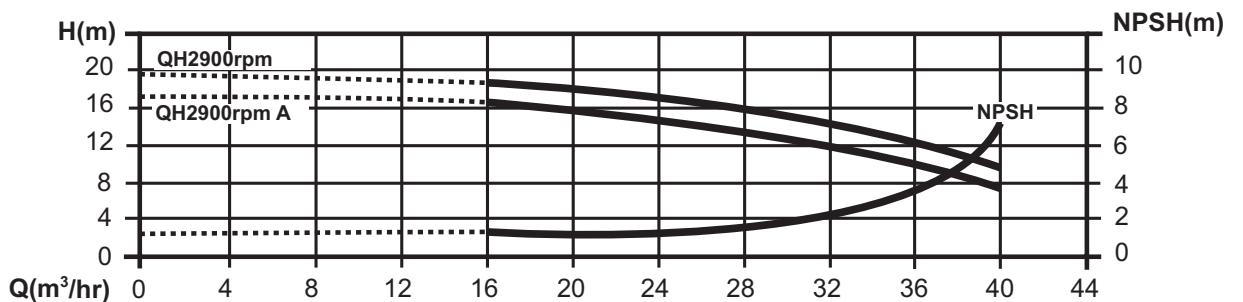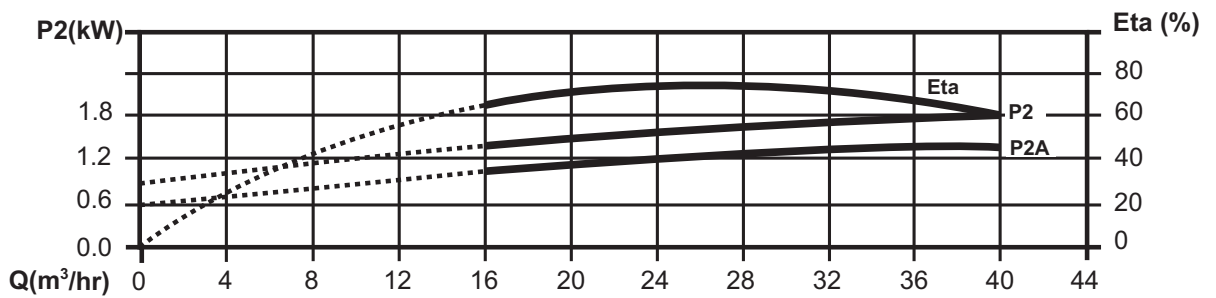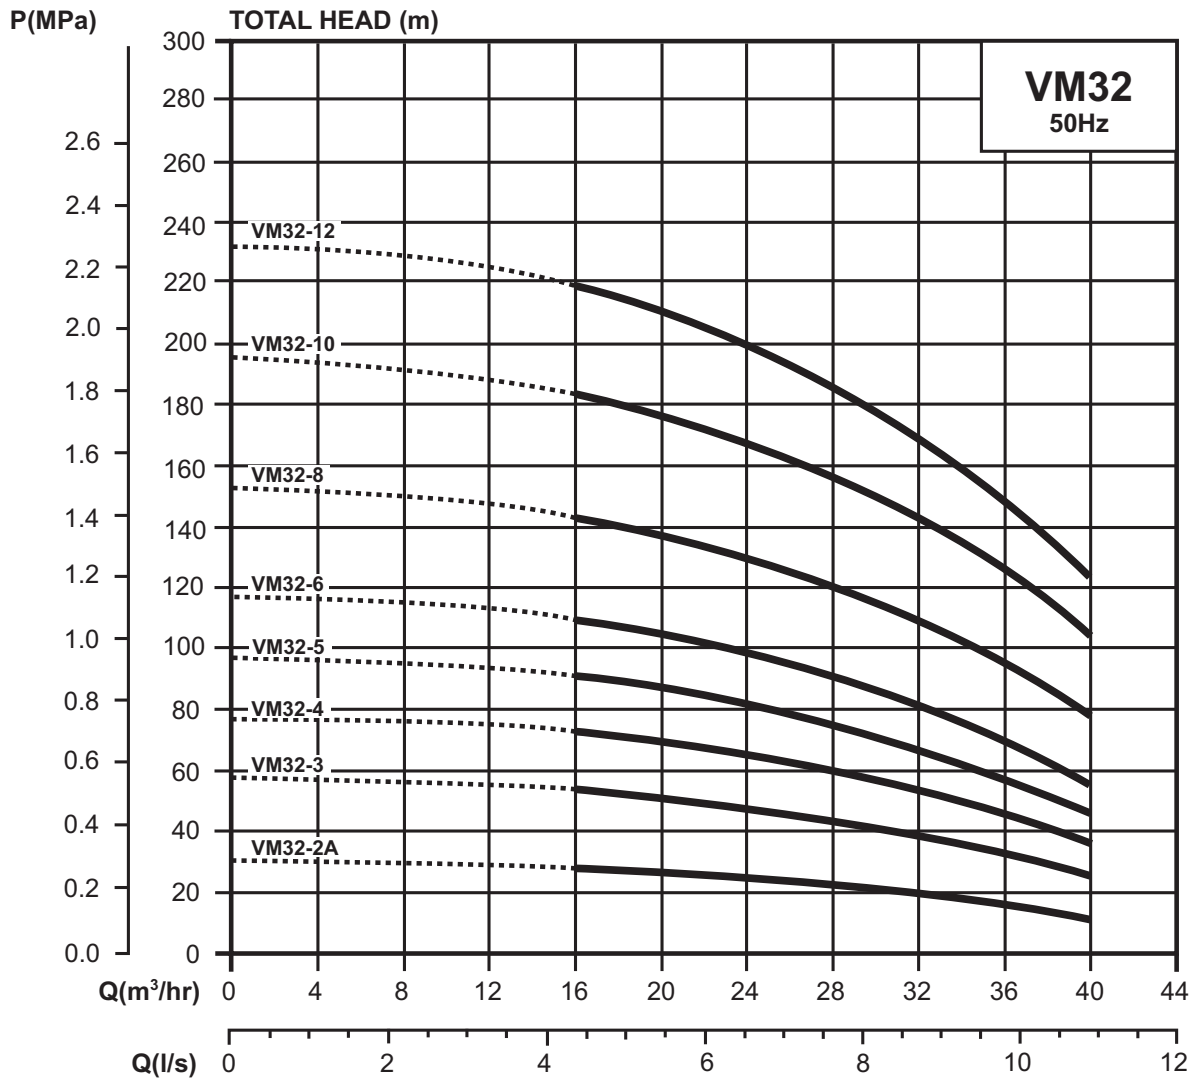

NOTE: CURVE TOLERANCE IN CONFORMITY WITH ISO9906 APPENDIX A.

TECHNICAL SPECIFICATIONS




VM65 HYDRAULIC PERFORMANCE

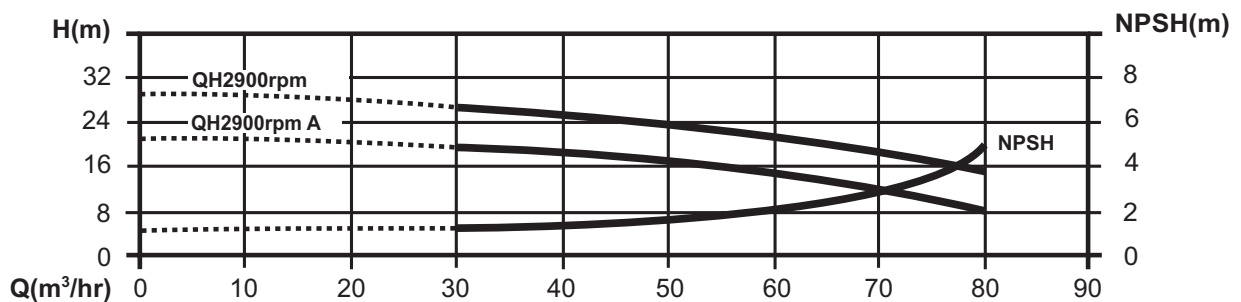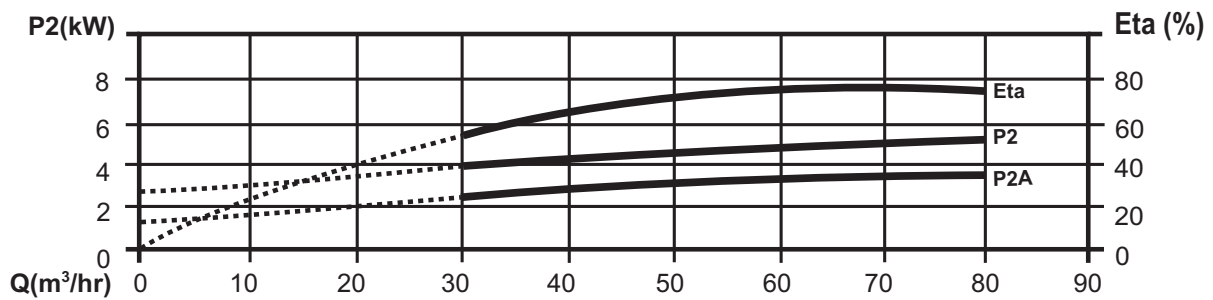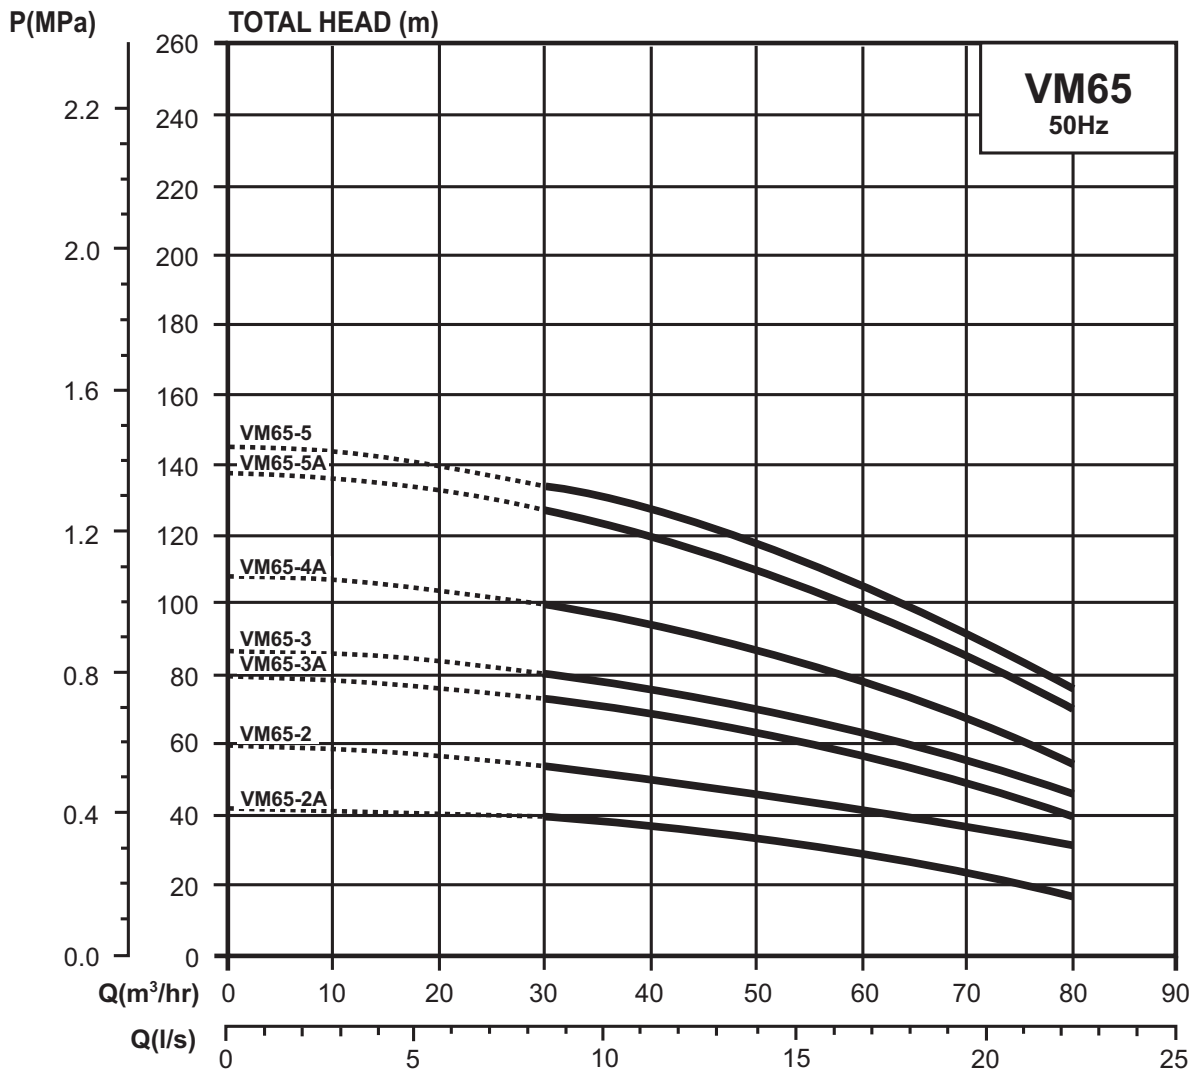

NOTE: CURVE TOLERANCE IN CONFORMITY WITH ISO9906 APPENDIX A.

TECHNICAL SPECIFICATIONS


VM90 HYDRAULIC PERFORMANCE

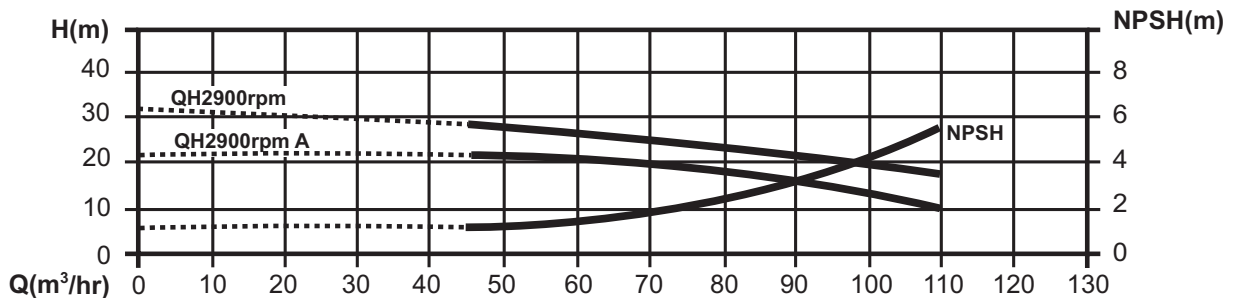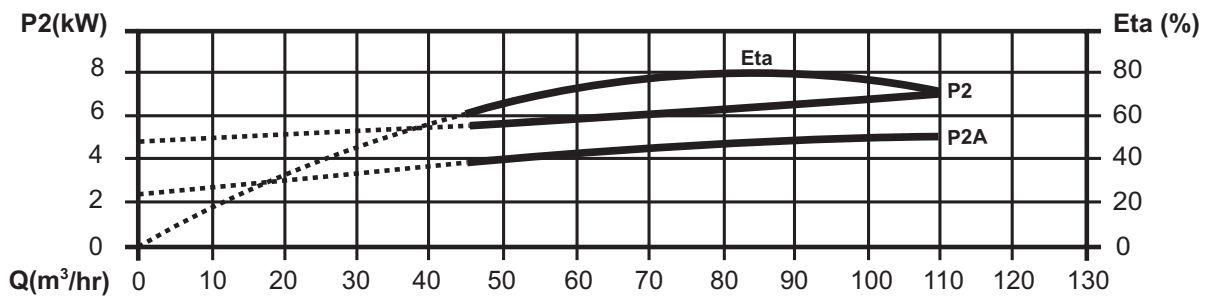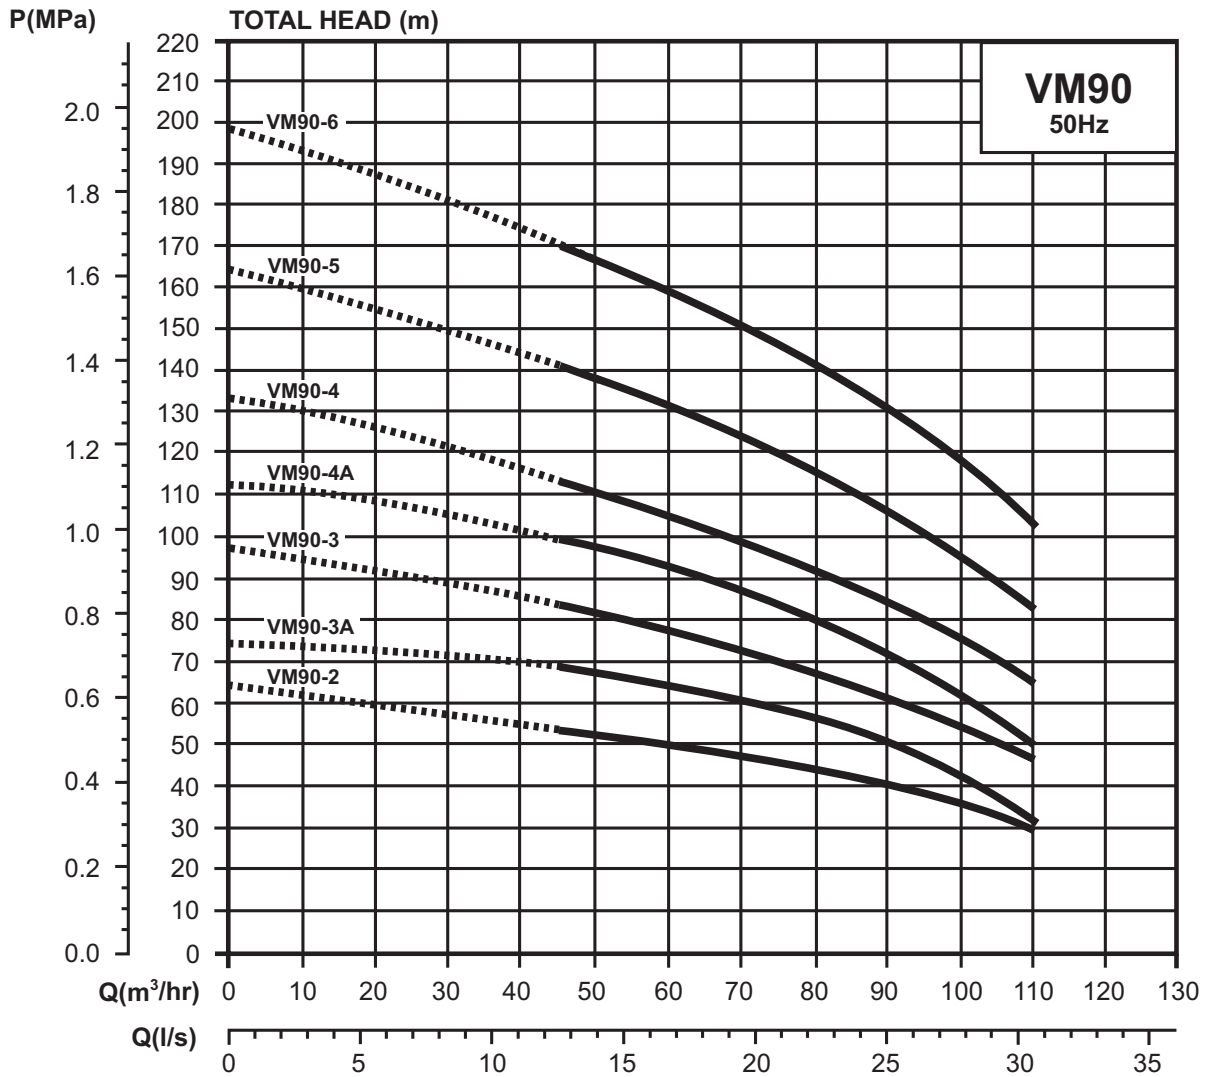


NOTE: CURVE TOLERANCE IN CONFORMITY WITH ISO9906 APPENDIX A.

DIMENSIONS


VM3 / VM5 - PN25

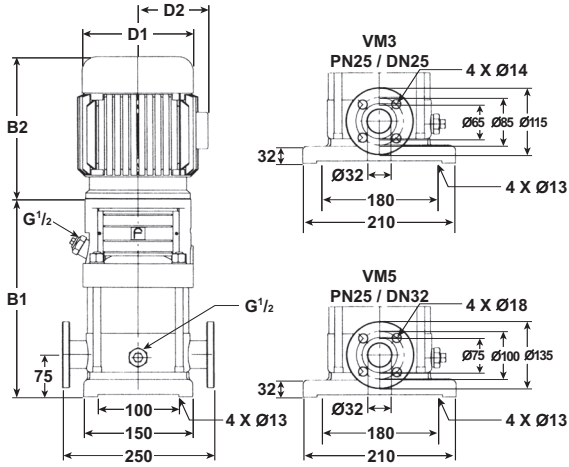


VM10 - PN25

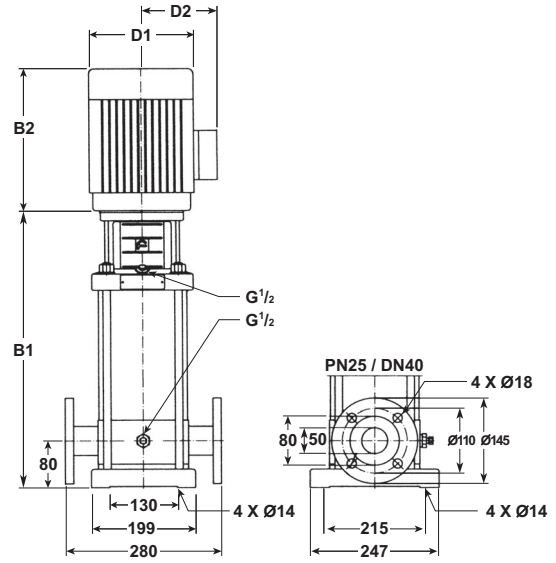


VM16 - PN25

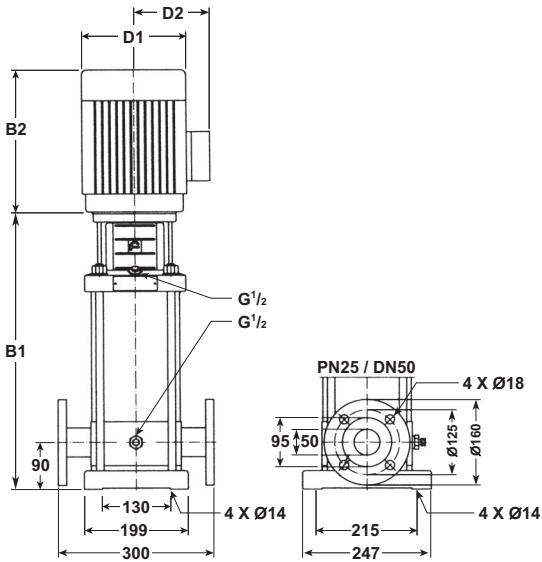


VM32 - PN25/40

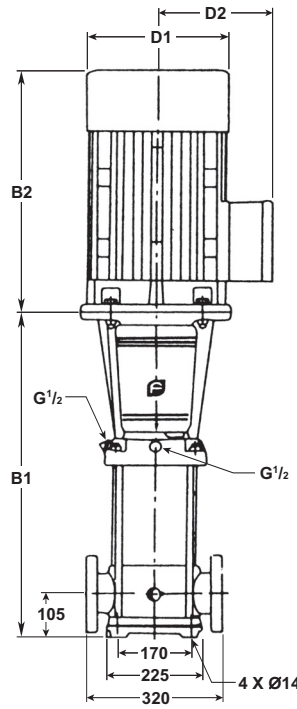


VM65 - PN16

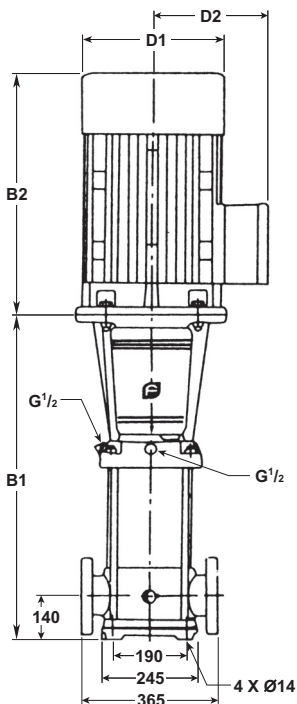


VM90 - PN16

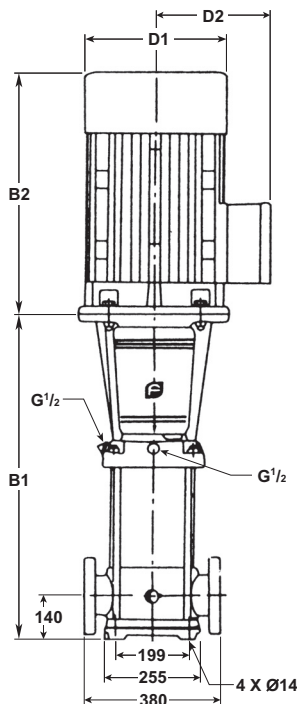

VM65 - PN16



VM90 - PN16



TECHNICAL SPECIFICATIONS

NOTE: ALL MOTOR DIMENSIONS ARE FOR THREE PHASE MOTORS.

DIMENSIONS

Pump Model	Motor kW	Dimensions (mm) & weights (kg)					Weight kg
		B1	B2	B1+B2	D1	D2	
VM3 SERIES							
VM3-8	0.75	333	245	578	170	142	22
VM3-12	1.1	405	245	650	170	142	25
VM3-15	1.5	459	290	749	190	155	25
VM3-17	1.5	512	290	802	190	155	30
VM3-19	2.2	548	290	838	190	155	35
VM3-23	2.2	620	290	910	190	155	40
VM3-29	3.0	728	315	1043	197	165	40
VM5 SERIES							
VM5-5	1.1	324	245	569	170	142	25
VM5-7	1.5	395	290	685	190	155	30
VM5-8	1.5	422	290	712	190	155	30
VM5-10	2.2	476	290	766	190	155	30
VM5-12	3.0	530	315	845	197	165	35
VM5-14	3.0	592	315	907	197	165	35
VM5-16	3.0	646	315	961	197	165	40
VM5-19	4.0	727	335	1062	230	188	45
VM5-22	5.5	808	430	1238	260	208	50
VM10 SERIES							
VM10-4	1.5	420	290	710	190	155	30
VM10-5	2.2	450	290	740	190	155	40
VM10-6	2.2	480	290	770	190	155	40
VM10-7	3.0	510	315	825	197	165	45
VM10-8	3.0	550	315	865	197	165	45
VM10-9	4.0	580	315	895	197	165	50
VM10-10	4.0	610	335	945	230	188	55
VM10-12	5.5	670	430	1100	260	208	57
VM10-14	5.5	750	430	1180	260	208	80
VM10-16	5.5	810	430	1240	260	208	80
VM10-18	7.5	870	430	1300	260	208	90
VM16 SERIES							
VM16-2	2.2	400	290	690	190	155	40
VM16-3	3.0	455	315	770	197	165	50
VM16-4	4.0	500	335	835	230	188	55
VM16-5	5.5	565	430	995	260	208	70
VM16-6	5.5	610	430	1040	260	208	75
VM16-8	7.5	700	430	1130	260	208	80
VM16-11	11.0	865	490	1355	330	255	142
VM16-14	15.0	1000	490	1490	330	255	160
VM32 SERIES							
VM32-2A	3.0	455	315	770	197	165	75
VM32-3	5.5	645	430	1075	260	208	93
VM32-4	7.5	715	430	1145	260	208	102
VM32-5	11	890	490	1380	330	255	172
VM32-6	11	960	490	1450	330	255	176
VM32-8	15	1100	490	1590	330	255	192
VM32-10	18.5	1240	550	1790	330	255	222
VM32-12	22	1380	590	1970	360	285	263
VM65 SERIES							
VM65-2A	7.5	644	430	1074	260	208	120
VM65-2	11	754	490	1244	330	255	155
VM65-3A	15	836	490	1326	330	255	195
VM65-3	18.5	836	550	1386	330	255	205
VM65-4A	22	919	550	1469	330	255	208
VM65-5A	30	1001	660	1661	400	310	345
VM65-5	30	1001	660	1661	400	310	345
VM90 SERIES							
VM90-2	15	773	490	1263	330	255	198
VM90-3A	18.5	865	550	1415	330	255	212
VM90-3	22	865	590	1455	360	285	265
VM90-4A	30	957	660	1617	400	310	348
VM90-4	30	957	660	1617	400	310	348
VM90-5	37	1049	660	1709	400	310	375
VM90-6	45	1141	700	1841	460	340	438

TECHNICAL SPECIFICATIONS

MOTOR TECHNICAL SPECIFICATIONS

Motor 1Ø	Frame	IP Rating	FLC 240 V	Start/LRC Ratio	RPM	Eff %	Bearings	
							Drive End	Non-D/End
0.75	80 V18	IP56	4.38	5.83	2815	72	6204-ZZ	6204-ZZ
1.1	80 V18	IP56	6.38	5.65	2830	75	6204-ZZ	6204-ZZ
1.5	90 V18	IP56	8.08	5.57	2850	76	6205-ZZ	6205-ZZ
2.2	90 V18	IP56	12.0	4.59	2830	77	6205-ZZ	6205-ZZ
3.0	100 V18	IP56	18.0*	5.0	2870	81	6206-ZZ	6205-ZZ
4.0	112 V18	IP56	22.0*	6.4	2910	84	6207-ZZ	6206-ZZ

*For 480V single phase operation multiply by 0.5.

Motor 3Ø	Frame	IP Rating	FLC 415 V	Start/LRC Ratio	RPM	Eff %	Bearings	
							Drive End	Non-D/End
0.75	80 V18	IP55	1.6	5.5	2800	89.0	6204-ZZ	6204-ZZ
1.1	80 V18	IP55	2.2	6.2	2828	82.4	6204-ZZ	6204-ZZ
1.5	90 V18	IP55	3.1	5.3	2800	78.0	6205-ZZC3	6205-ZZC3
2.2	90 V18	IP55	4.2	6.7	2800	85.0	6205-ZZC3	6205-ZZC3
3	100 V18	IP55	5.7	6.8	2853	86.2	6206-ZZC3	6206-ZZC3
4	112 V18•	IP55	7.3	6.7	2902	86.8	6306-S	6306-S
5.5	132 V1•	IP55	9.8	7.4	2916	89.9	7308B	6308ZZC3
7.5	132 V1•	IP55	13.3	7.4	2892	87.0	7308B	6308ZZC3
11.0	160 V1•	IP55	19.4	7.9	2925	88.3	7309B	6309ZZC3
15.0	160 V1•	IP55	25.5	8.4	2931	89.3	7309B	6309ZZC3
18.5	160 V1•	IP55	31.3	8.3	2938	91.4	7309B	6309ZZC3
22.0	180 V1•	IP55	36.8	7.7	2951	90.4	6311	7311
30.0	200 V1•	IP55	49.4	7.9	2950	91.4	6312	7312
37.0	200 V1•	IP55	60.9	7.6	2950	92.1	6312ZZC3	7312B
45.0	225 V1•	IP55	74.8	7.8	2962	92.6	6313C3	7313B

•Special motor bearings fitted for thrust management.

ELECTRICAL DATA

Maximum ambient temperature	
Single Phase	45°C
Three Phase	40°C
Minimum IP rating	IP55
Insulation class	Class F

This literature is not a complete guide to product usage. Further information is available from your Davey dealer, Davey Customer Service Centre and from the relevant product Installation and Operating Instructions. This data sheet must be read in conjunction with the relevant product Installation and Operating Instructions and all applicable statutory requirements. Product specifications may change without notice.

© Davey is a registered trademark of Davey Water Products Pty Ltd. © Davey Water Products Pty Ltd 2006.



Visit Davey on-line for further information
davey.com.au

DEPEND ON
DAVEY

WATER PRODUCTS

Davey Water Products Pty Ltd

Member of the GUD Group
ABN 18 066 327 517

Head Office and Manufacturing

6 Lakeview Drive,
Scoresby, Australia 3179
Ph: +61 3 9730 9222
Fax: +61 3 9753 4100
Website: davey.com.au

Customer Service Centre

Ph: 1300 367 866
Fax: 1300 369 119
E-mail: sales@davey.com.au

Interstate Offices

Sydney • Brisbane • Adelaide
Perth • Townsville

International

6 Lakeview Drive,
Scoresby, Australia 3179
Ph: +61 3 9730 9121
Fax: +61 3 9753 4248
E-mail: export@davey.com.au

Germany

Kantstrasse 53,
04275 Leipzig
Ph: +49 341 301 0412
Fax: +49 341 301 0413
E-mail: akrenz@daveyeurope.com

USA

Ph: +1 630 898 6976
Website: daveyusa.com
E-mail: sales@daveyusa.com

Davey Water Products – New Zealand

7 Rockridge Avenue,
Penrose, Auckland 1061
Ph: +64 9 570 9135
Fax: +64 9 527 7654
Website: daveynz.co.nz
E-mail: sales@daveynz.co.nz

Davey Spa – New Zealand

2 Rothwell Avenue,
North Harbour, Auckland 0632
Ph: +64 9 415 8622
Fax: +64 9 415 8621
Website: spa-quip.co.nz
E-mail: service@spa-quip.co.nz